

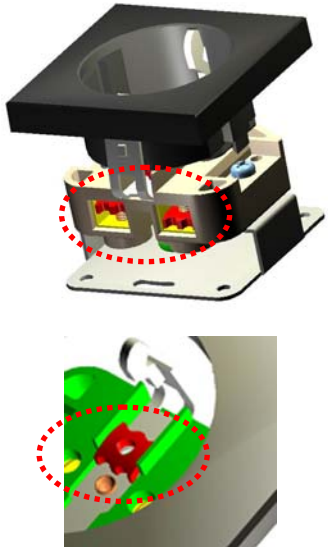




Power Connectors: European and other product versions

<p>1</p> <p>New 2007</p> <p>FI-E35(R)-N1 5,020.-/pcs.</p> <p>FI-E35(G)-N1 3,920.-/pcs.</p>	<p>High End Performance SCHUKO connectors</p> <ul style="list-style-type: none"> • α (Alpha) Pure Copper Conductor • Materials: Front body Nylon/fiberglass • Shell polycarbonate • Specifications: Accommodates cable diameters from 6.0mm to 17.0mm • Dimensions: Body length 56.0mm x 39.0mm diameter x 88mm overall length • Rated: 16A/250V 	
<p>2</p> <p>FI- E11 (G) 2,510.-/pcs.</p> <p>FI- E11 (Cu) 1,880.-/pcs.</p>	<p>High Performance SCHUKO connectors</p> <ul style="list-style-type: none"> • α (Alpha) Phosphor Bronze Conductor for FI-E11(G) • α (Alpha) Eutectic brass Conductor for FI-E11(Cu) • Materials: Front body Nylon/fiberglass • Shell polycarbonate • Specifications: Accommodates cable diameters from 6.6mm to 16.0mm(With a longer screw up to 20mm) • Dimensions: Body length 56.0mm x 39.0mm diameter x 88mm overall length • Rated: 16A/250V 	
<p>3</p> <p>FI- E30 (R) 1,880.-/pcs.</p> <p>FI- E30 (G) 1,255.-/pcs.</p>	<p>High Performance SCHUKO sockets</p> <ul style="list-style-type: none"> • α (Alpha) Eutectic brass Conductor • Materials: Nylon/fiberglass body • Type: 2-Pole + Earth • Rating: 16A/250V • Specifications: Accommodates wire diameters to 2.5mm max. (12 AWG) • Dimensions: 50.6 (L) x 50.6 (W) x 36mm (H) 	
<p>4</p> <p>FI- UK (R) (1363) 6,150.-/pcs.</p> <p>FI- UK (G) (1363) 5,020.-/pcs.</p>	<p>High End Performance Power connectors for UK & Ireland</p> <ul style="list-style-type: none"> • α (Alpha) Eutectic brass Conductor • Material: Fireproof ABS body/housing • Specifications: Accommodates cable diameters of 6.0mm to 20.0mm • Dimensions: Body 48mm (W) x 50.2mm (L) x 55.8mm (H) / 89.5mm overall length • Rated: 13A Fused/250V 	

<p>5</p> <p>FI- AU (R) (3112) 5,020.-/pcs.</p> <p>FI- AU (G) (3112) 4,080.-/pcs.</p>	<p>High End Performance Power connectors for Australian/New Zealand</p> <ul style="list-style-type: none"> • α (Alpha) Pure copper Conductor • Earth (Ground) Jumper System. • Material: Nylon/fiberglass front body • Polycarbonate shell • Specifications: Accommodates cable diameters of 6.6mm to 20.0mm • Dimensions: Body length 40.0mm x 44mm diameter x 80mm overall length • Rated: 10A/250V 	
<p>6</p> <p><u>New 2007</u></p> <p>FT-SWS (R) 5,520.-/pcs.</p> <p>FT-SWS (G) 4,700.-/pcs.</p> <p>FP-SWS (G) 3,450.-/pcs.</p>	<p>High End Performance SCHUKO Wall Sockets</p> <p>FT-SWS α (Alpha) Phosphor Bronze Conductor(t : 0.5mm)</p> <p>FP-SWS α (Alpha) Eutectic cast brass Conductor(t : 0.5mm)</p> <ul style="list-style-type: none"> • Material: Nylon/fiberglass body and Poly carbonate cover; Bracket with a 1.0mm thick stainless brace plate and Zn-Mg Alloy cast Front Plate with Carbon fiber finishing (FT-SWS) or FO-Q vibration damping material (FP-SWS). • Specified for wire diameters of 2.5mm (set screw) • Dimensions: 95.0mm (L) x 95.0mm (W) x 45.9mm(H) <p>Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate (see right side) that increases the contact area of the Alpha Conductors.</p>	
<p><u>New 2007</u></p> <p>FT-SDS (R) 3,000.-/pcs.</p> <p>FT-SDS (G) 2,380.-/pcs.</p>	<p>High End Performance SCHUKO Distributor Socket</p> <ul style="list-style-type: none"> • α (Alpha) Phosphor Bronze Conductor(t : 0.5mm) • Material: Nylon/fiberglass body and Poly carbonate cover; Base Bracket with a 1.0mm thick stainless brace plate • Specified for wire diameters of 2.5mm (set screw) • Dimensions: 55.4mm (L) x 55.4mm (W) x 52.0mm(H) <p>Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate (see right side) that increases the contact area of the Alpha Conductors.</p>	
<p>5</p> <p><u>New 2007</u></p> <p>G-320Ag-18-E 6,200.-/pcs.</p>	<p>High Performance Power Cable for Video displays • 1.8 m</p> <p>Red- 37 strands of 0.26mm silver-plated α (Alpha) OFC Conductor</p> <p>Yellow -37 strands of 0.26mm silver-plated α (Alpha)OFC Conductor</p> <p>Green- 37 strands of 0.26mm α (Alpha) OFC Conductor</p> <p>Insulation: Polyethylene (Red/Natural/Yellow) 3.5mm diameter</p> <p>Fillers: Cotton with paper tape wrap</p> <p>Sheath: Flexible PVC (Burgundy) approx. 10mm diameter</p>	

<p><u>New 2007</u></p> <p>G-320Ag-18F8-E Figure 8 Connector</p> <p>7 6,200.-/pcs.</p>	<p>High Performance Power Cable for CD/DVD players • 1.8 m</p> <p>Red- 37 strands of 0.26mm silver-plated α (Alpha) OFC Conductor Yellow -37 strands of 0.26mm silver-plated α (Alpha)OFC Conductor Green- 37 strands of 0.26mm α (Alpha) OFC Conductor Insulation: Polyethylene (Red/Natural/Yellow) 3.5mm diameter Fillers: Cotton with paper tape wrap Sheath: Flexible PVC (Burgundy) approx. 10mm diameter</p>	
--	---	---

Remark : (G) = 24k Gold Plated, (R) = Rhodium Plated, (Ag) = Silver Plated, (Cu) = Non-Plated.

All metallic parts are treated with

FURUTECH Alpha Cryogenic and Demagnetizing Treatment

FURUTECH reserves the right to change product specifications without prior notice.

FURUTECH CO., LTD.

www.furutech.com

service@Furutech.com

Make A More Powerful Connection with Furutech!