

FURUTECH

Power & IEC UK

<p>FI-E50(R)</p> <p>24,300.-</p>	<p>High End Performance SCHUKO Connector</p> <ul style="list-style-type: none"> • α (Alpha) Pure copper Rhodium plated Conductor • Nylon/fiberglass body incorporating nano sized ceramic particles for absorption of vibration resonance. • Multi layered nonmagnetic stainless steel and carbon fiber housing and incorporating acetal copolymer. The best of damping and insulation materials for improvements in frequency extension and tonal quality.. • Specified for cable diameters from 6mm to 20mm • Dimensions: Body length 56.8mm x 40.5mm diameter x 96mm overall length • Metal cable clamp for improved grip and reduction of mechanically and electrically induced distortion 	
<p>FI-E38(R)</p> <p>8,500.-/pcs.</p>	<p>High End Performance SCHUKO Connector</p> <ul style="list-style-type: none"> • α (Alpha) pure-copper rhodium-plated conductors • Floating Field Damper System* • Nylon/fiberglass body incorporating carbon particles that absorb vibration and resonance • Specified for cable diameters from 6mm to 17.5mm • Dimensions: 39.6mm diameter x 90.5mm overall length • Metal cable clamp improves grip and reduces mechanically and electrically induced distortion • Rating: 16A 250V AC 	
<p>FI-E38(G)</p> <p>6,800.-</p>	<ul style="list-style-type: none"> • 24k Gold-plated conductors α (Alpha) pure-copper • Earth (Ground) Jumper System (US Patent No.: 6,669,491) • Nylon/fiberglass body incorporating carbon particles that absorb vibration and resonance • Specified for cable diameters from 6.6mm to 17.5mm • Dimensions: FI-E38(G)---39.6mm diameter x 90.5mm overall length • Metal cable clamp improves grip and reduces mechanically and electrically induced distortion 	
<p>FI-E11-N1(G)</p> <p>4,900.-</p> <p>FI-E11(Cu)</p> <p>3,400.-</p>	<p>High Performance SCHUKO Connector</p> <ul style="list-style-type: none"> • α (Alpha) pure-copper rhodium-plated conductors • Floating Field Damper System* • Nylon/fiberglass body incorporating carbon particles that absorb vibration and resonance • Specified for cable diameters from 6mm to 17.5mm • Dimensions: 39.6mm diameter x 90.5mm overall length • Metal cable clamp improves grip and reduces mechanically and electrically induced distortion • Rating: 16A 250V AC 	



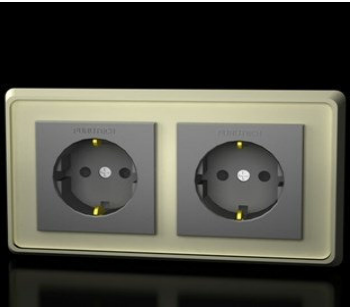
FURUTECH

Power & IEC UK

<p>FI-E11-N1(R) 5,800.-</p>	<ul style="list-style-type: none"> • α (Alpha) Pure Copper Conductor • Nylon /fiberglass front body, Polycarbonate (Transparent Blue)) shell • Specified for cable diameters of 6.6mm to 16.0mm (with a longer screw up to 20mm) • Stainless (Black painting) cable damping clamp with stainless screws (M4 X 20mm L) • Dimensions: Body length 48.2mm X 39.0mm dia. X 88.0mm overall length.. 	
<p>FI-AU3112(R) 8,000.-</p> <p>FI-AU3112(G) 7,000.-</p>	<p>High End Performance AS/NZS Connector</p> <ul style="list-style-type: none"> • Pure copper α (Alpha) Conductor • Earth (Ground) Jumper System. • Material: Nylon/fiberglass front body • Polycarbonate shell • Specifications: Accommodates cable diameters of 6.6mm to 20.0mm • Dimensions: Body length 40.0mm x 44 mm diameter x 80mm overall length • Rated: 10A/250V 	
<p>FI-UK1363(G) 7,450.-</p> <p>FI-UK1363(R) 9,100.-</p> <p>FI-UK1363 NCF (R) 11,200.-</p>	<p>High End Performance BS-1363 Connector</p> <ul style="list-style-type: none"> • Eutectic copper alloy α (Alpha) Conductor • Material: Fireproof ABS body/housing • Specifications: Accommodates cable diameters of 6.0mm to 20.0mm • Dimensions: Body 48mm (W) x 50.2mm (L) x 55.8mm (H) • Rated: 13A Fused/250V 	
<p>FI-UK1363-N1(Cu) 5,250.-</p> <p>FI-UK1363-N1(G) 7,450.-</p> <p>FI-UK1363NCF-N1(G) 10,200.-</p>	<p>RATING FI-UK-N1G - Gold plated FI-UK-N1Cu- Unplated (treated with antioxidant)</p> <p>FEATURES SPECIFICATIONS</p> <ul style="list-style-type: none"> • α (Alpha) Eutectic Copper Alloy Conductor. • Material: Fireproof ABS body/housing • Specifications: Accommodates cable diameters of 6.0mm to 16.0mm • Dimensions: Body--- 50.4mm (W) x 50.2mm (L) x 55.8mm (H) without cable clamp parts • Rated: 13A Fused / 250V AC 	

FURUTECH

Power & IEC UK

<p>FT-SWS (R) เลิกผลิต</p>	<p>FT-SWS (R) Rhodium Plated Non-magnetic pure copper conductors and Carbon fiber finished front plate</p> <ul style="list-style-type: none"> • α (Alpha) Pure Copper main Conductor (t : 0.5mm) • Material: Nylon/fiberglass body and Poly carbonate cover • 1.0mm thick Bracket with a Zinc/steel brace plate • Carbon fiber finished Cast Zn-Mg Alloy Front Plate • Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw) • Dimensions: 95.0mm (L) x 95.0mm (W) x 48.0mm(H) • Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate that increases the contact area of the Alpha Conductors 	
<p>FP-SWS (G) 5,250.-</p>	<p>High Performance Schuko Wall Socket FP-SWS (G) Gold Plated Non-magnetic pure copper conductors The perfect upgrade for the final touch to your AC chain</p> <ul style="list-style-type: none"> • α (Alpha) Pure Copper Conductor (t : 0.5mm) • Material: Nylon/fiberglass body and Poly carbonate cover • 1.0mm thick Zinc/steel brace plate Bracket • ABS Front Plate • Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw) • Dimensions: 95.0mm (L) x 95.0mm (W) x 48.0mm(H) • Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate that increases the contact area of the Alpha Conductors 	
<p>FP-SWS-D(G) 9,600.-</p>	<p>High Performance Duplex SCHUKO Wall Sockets FP-SWS-D(R) - Rhodium Plated Pure Copper Conductors FP-SWS-D(G) - Gold Plated Pure Copper Conductors</p> <ul style="list-style-type: none"> • Gold or Rhodium plated α (Alpha) Pure copper main Conductor (t : 0.5mm) • Material: Nylon/fiberglass body and Poly carbonate cover; Bracket with a 1.0mm thick Zinc/steel brace plate and spray finished ABS front plate • Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw) • Dimensions: 152.0mm (L) x 81.0mm (W) x 48.0mm(H) • Furutech's total attention to detail and build quality extends right down to a specially designed patent-pending pressure plate (see below) that increases the contact area of the Alpha Conductors 	

FURUTECH

Power & IEC UK

<p>FI-E30(NCF)(R)</p> <p>3,200.-</p>	<p>High Performance SCHUKO sockets</p> <ul style="list-style-type: none"> • α (Alpha) Eutectic copper alloy Conductor • Materials: Nylon/fiberglass body • Specifications: Accommodates wire diameters to 2.5mm max.(12 AWG) • Dimensions: 50.6 (L) x 50.6 (W) x 36mm (H) • Rated: 16A/250V 	
<p>FP-1363-D(NCF)(R)</p> <p>18,300.-</p> <p>FP-1363-D(G)</p> <p>11,500.-</p>	<p>High Performance Duplex UK Mains Wall Sockets FP-1363-D(R) Rhodium plated duplex wall socket FP-1363-D(G) Gold plated duplex wall socket</p> <ul style="list-style-type: none"> • α (Alpha) Pure copper main Conductor (t : 1.2 mm) • Cover material: Poly carbonate cover • Chassis plate material: The special grade aluminum front plate (t:10mm) • Body material: Nylon/fiberglass body • Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw) <p>Dimensions: FP-1363-D---152.0mm (L) x 86.0mm (W) x 25.0mm(H)</p>	
<p>FP-1363-S(NCF) (R)</p> <p>11,300.-</p> <p>FP-1363-S(G)</p> <p>7,200.-</p>	<p>High Performance Single UK Mains Wall Sockets FP-1363-S(R) Rhodium plated single wall socket FP-1363-S(G) Gold plated single wall socket</p> <ul style="list-style-type: none"> • α (Alpha) Pure copper main Conductor (t : 1.2 mm) • Cover material: Poly carbonate cover • Chassis plate material: The special grade aluminum front plate (t:10mm) • Body material: Nylon/fiberglass body • Specified for wire diameters of 2.8mm or 5.5 Sq.mm/10AWG Max. (set screw) <p>Dimensions: FP-1363-S---86.0mm (L) x 86.0mm (W) x 25.0mm(H)</p> <p>Type: 2-pole+earth Rating: 13A 250V A.C.</p>	